

T8 & T5 HighBay Fixtures

Specs:


Total Luminaire efficiency: 91%

Lumen output: 23424 lumens

Lamp Life: 20,000 Hours

Watts used : 192 Watts.

Dual Ballast

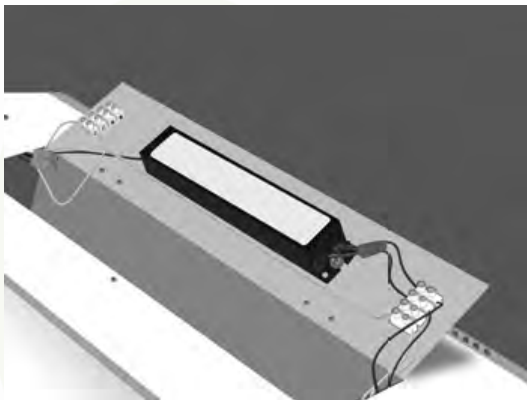

HighBay Fixture Door

Hinged access door on the back of the fixture eliminates the need to take off the reflector to wire the ballast. Quick connects makes the job even quicker

PRODUCT FEATURES:

- **Designed for HID to Fluorescent retrofit**
- **High Polish Reflector – 90% enhanced**
- **High Efficiency - Universal Voltage Ballast**
- **Quick Connects - For Easy Install**
- **Hooks and Chains - For Mounting**
- **Hinged Access Door for Ballast Change**
- **Maximum Photometric Efficiency**
- **5-Year Warranty**
- **20 Gauge Galvanized Steel**
- **HPT8 Certified; visit [www.CEE1](http://www.CEE1.com).**

Fixture: 20 Gauge die formed Galvanized Steel housing, with post-painted white baked on enamel to guarantee long life, even in harsh environments. Hinged ballast door means easy access to the ballast without tools or without taking down the fixture. Ample slots for hook and chain hanging (supplied). Fixture is shipped fully wired.

Reflectors: High polish reflector is 90% enhanced for maximum light output. Reflector designed for maximum photometric efficiency and maximum lumens.

Ballast: The fixture comes standard with High Efficiency Universal Voltage Ballast; for 120 Volts through 277 Volts (inclusive). This is a Nominal Ballast Factor ballast. We use a High Efficiency High Ballast Factor Universal Ballast; for 120Volts through 277 Volts (inclusive). Both the fixture and the ballasts have Quick Connects to speed up install and maintenance.

Accessories: Wire Guards and Lens and Door Frames come with Easy Lock catches which enable fixture to be opened from either side. Halves maintenance time as it eliminates excess moving of ladders or lifts. 10 Foot 3-Wire cord with plug also has Quick Connects for easy install.